


LED PANEL 600 X 300mm

24W

Fits in suspended ceiling grid. Direct replacement for fluorescent luminaires. Installs in minutes!

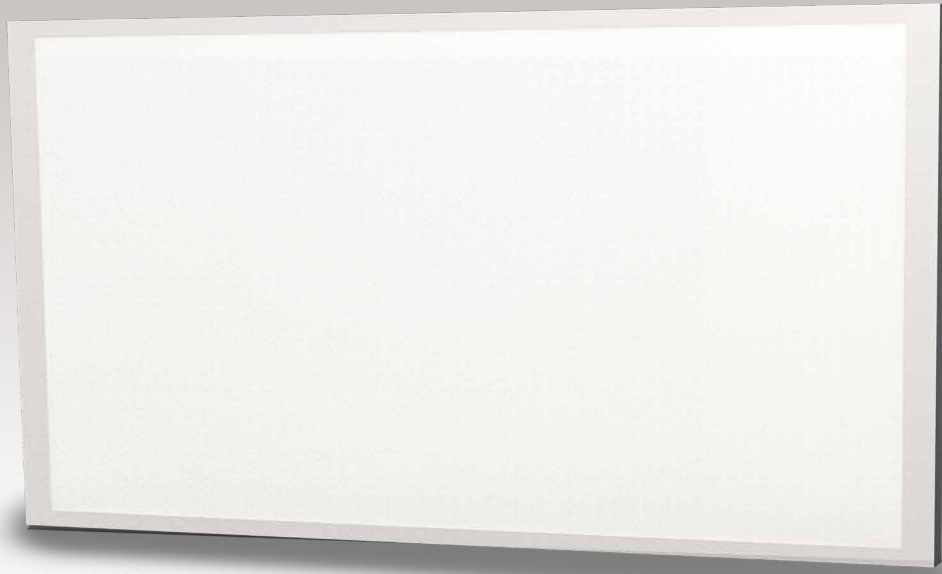

Emergency Version Available



FEATURES:

- Low maintenance, long-life and eco-friendly design
- Save up to 60% on energy costs over fluorescent
- High-quality light
- Good colour rendition and low glare
- No flickering, no UV, no IR
- Direct replacement for fluorescent luminaires
- Installs in minutes
- In-house testing conducted to ensure quality and reliability

APPLICATIONS



EDUCATION



COMMERCIAL
KITCHENS



OFFICES



RETAIL

24W


LED PANEL

600 X 300mm

Fits in suspended ceiling grid. Direct replacement for fluorescent luminaires. Installs in minutes!

Part No.	223214	223221	223238
DESCRIPTION	LED Panel 24W White Frame 3000K	LED Panel 24W White Frame 4000K	LED Panel 24W White Frame 6000K
DIMENSIONS	595 x 295 x 10mm		
POWER CONSUMPTION	24W, 220-240VAC, 50-60Hz		
POWER FACTOR	0.92		
CURRENT	1150mA		
COLOUR TEMPERATURE	3000K (Warm White)	4000K (Cool White)	6000K (Daylight White)
COLOUR RENDITION (CRI)	Ra>80		
LUMENS	2160lm		
LIGHT EFFICACY	90lm/W		
IP RATING	IP20		
BEAM ANGLE	120°		
CONSTRUCTION	PC/ AL/ Steel		
WORKING TEMPERATURES	-20°C to +40°C		
ENERGY CONSUMPTION	24kWh/1000hrs		
DRIVER	Bright Source		
CERTIFICATION	CE, RoHS		
WARRANTY	1 year (+ 4 years extended warranty with online registration)		

BRIGHT SOURCE



Formerly rated A+
(same quality,
new energy rating
label regulations)

